kaneka

ARCHITECTURAL PHOTOVOLTAIC ROOF PANELS

Seamless Integration, Smarter Solar Solution, Proven Track Record

Blended Aesthetics
Panel design blends seamlessly with roof tiles

Durable & Reliable
Glass lamination with improved moisture barrier properties

Fire Retardant
Installed on top of fire retardant roof tiles

Easily Replaced
Can be easily partially replaced as needed

Maximize Coverage
Small panels maximize solar coverage on complex roofs

Partnering with Major Builders in Japan

100,000+ Homes installed in Japan*
*Including related product models



20+ YEARS of PROVEN RESULTS

in Japan








Preliminary Specifications


Appearance	
Pmax	60W
Voc	16.0V
Isc	4.97A
Vpm	13.1V
Ipm	4.60A
System Voltage	1000V
Design Load	+3600Pa/-1600Pa
Visible Dimension	1,000 x 364mm (39 3/8” x 14 5/16”)
Module Dimension	1,000 x 400 x 24.7mm (39 3/8” x 15 3/4“ x 1”)
Weight	4.0kg (8.8lb)
Cable	MC4 Evo2 Original

* Electrical characteristics are under Standard Testing Conditions; 25˚C, 1000W/m2, AM1.5

Front View

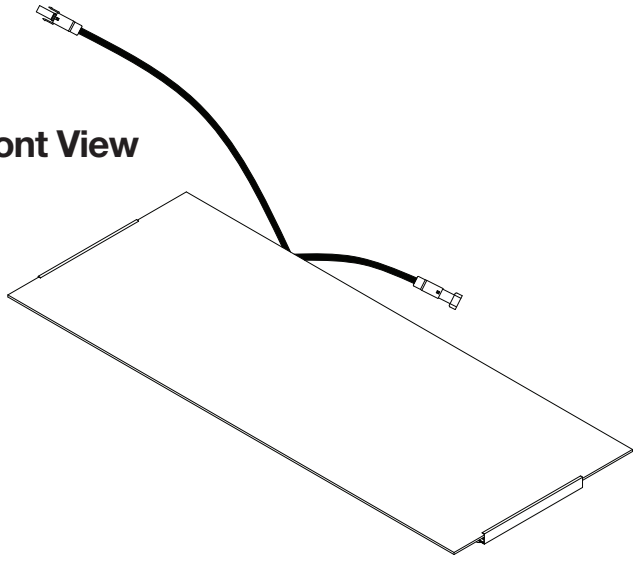

Back View

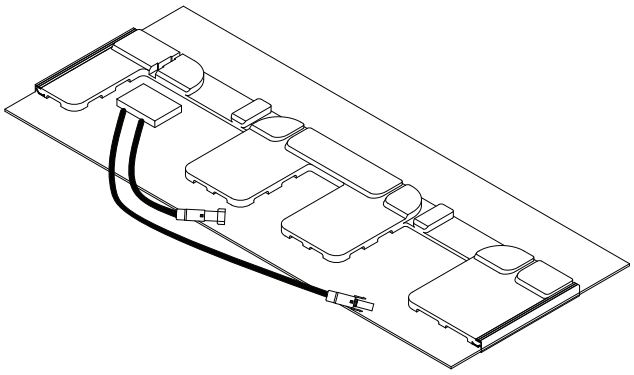

The values herein are not guaranteed values and indicative values only. Actual values may vary according to testing protocols. The specifications and any other information on this page may be changed at any time without notice based on improvements or any other reasons.

Disclaimer: The information above is still in testing.

Kaneka Corporation
1-12-32 Akasaka Minato-ku • Tokyo 107-6028 Japan
www.kaneka.com

Kaneka Americas Holding, Inc
6161 Underwood Road • Pasadena, Texas 77507 US
www.kanekaenergysolutions.com